




SHOCK-ABSORBING LANYARDS

Buck Arrest

6VV116

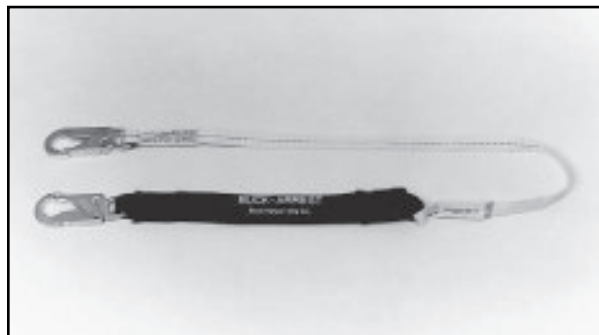

Buck Stop

54V716



Available in fixed or adjustable length

6VV116 - Fixed length 6 ft. with 1706 both ends

64V126 - Adjustable length - maximum 6 ft. with 1706 snap and loop to half-hitch to harness

64V716 - 6 ft. stretch with 1706 snap and loop to half-hitch to harness

5VV116 - Fixed length 6 ft. with 1706 both ends

54V126 - Adjustable length - maximum 6 ft. with 1706 snap and nylon loop to half-hitch to harness

54V716 - 6 ft. stretch with 1706 snap and nylon loop to half-hitch to harness

Buckstop 5V+K116 w/RotoSnap

*Other lengths available. Please contact us for part number.



Now You Can Tie-back with Confidence! A captive eye steel snap with a minimum tensile load of 10,000 lbs. and a gate/side load minimum of 5000 lbs.




Model 1711 (Option +K)
Alloy Steel RotoSnap
43/64" gate opening
5 3/16" long

11.2 oz. weight
Min. tensile strength 10,000 lbs.
Min. gate/side load 5000 lbs.


5V+K116 Buckstop Lanyard with Roto-Snap Carabiner.

Dual Lanyard

546716RDR enables the user to be 100% fall protected while ascending, working and descending steel structures.

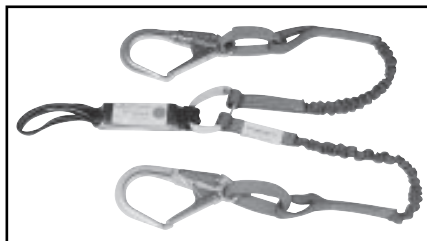

546716RDR

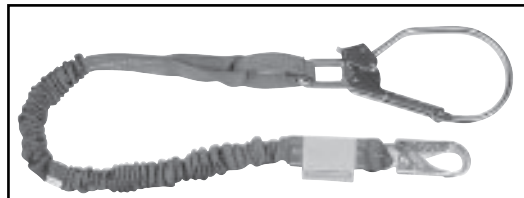

8VB716R

Buckyard Stretch w/Large Hook and Rescue Hook

8VB716R features a stretch core that reduces its overall length when working and climbing, keeping excess material from becoming a hindrance to the user.

30 Travis Avenue, PO Box 1690, Binghamton, NY 13902-1690
Phone 607-773-2405 • Fax 607-773-2414 • www.linemenssupply.com